


DAS-2CHD-OUT

Dante® 2CH Analog XLR Output Adapter with Gain Controls

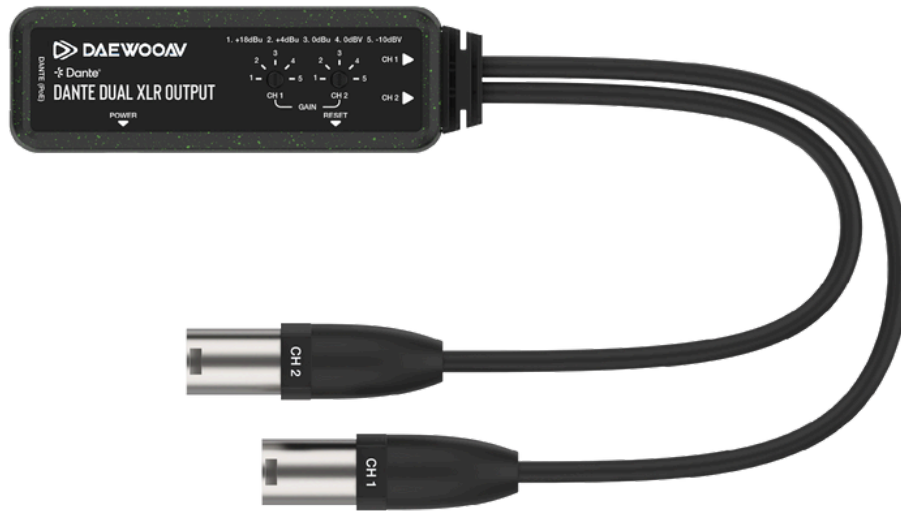

Experience exceptional digital audio quality with the Dante® 2CH digital-to-analog adapter, designed to deliver two-channel XLR analog output. Leveraging the advanced Dante® 2×2 platform, this adapter seamlessly converts pristine Dante® digital audio into balanced or unbalanced two-channel XLR analog signals.

Featuring a 5-level sensitivity adjustment for analog outputs, it allows you to easily fine-tune your sound. The adapter supports both USB-C and PoE power options, offering maximum flexibility and convenience. Ideal for professional audio setups that require superior performance.

Connections

INPUT: 1x DANTE [RJ45 LAN, PoE]
1x POWER [USB-C power and firmware update port, 12-pin female]

OUTPUT: 1x CH1/CH2 LINE OUT [XLR female plug, with 30cm cable]

Mechanical

Dimensions: 115mm [W] x 40mm [D] x 28mm [H]

Weight: 173 Gm

Power Consumption : 2W(Max)



DAEWOOAV

DAS-2CHD-OUT

Dante® 2CH Analog XLR Output Adapter with Gain Controls

Technical:

Input:	Dante® 2CH digital audio
Output:	Two-channel balanced/unbalanced XLR analog audio
Control:	Dante® Controller
Network Bandwidth:	100M
Audio Latency:	Configurable Dante® device latency (Supports 1, 2 or 5ms configurable using Dante® Ctr)
Audio Format:	DANTE IN [Digital audio input, PCM 2CH 44.1K-96KHz 16/24bit] XLR OUT [Analog audio output, Balanced/unbalanced 2CH, Max output level +18dBu]
Audio Parameter:	XLR OUT Output Impedance: 600 Ohm balanced, 300 Ohm unbalanced Line Output Level (Maximum): +18dBu (6.15Vrms) @balanced audio, +12dBu (3.08Vrms) Frequency Response: 20Hz to 20kHz (-/+0.5dB) Dynamic Range: >100dB@0dBu, 1kHzA-weighted Audio S/N Ratio: >100dB@0dBu, 1kHzA-weighted Audio THD+N: < 0.01% at +4dBu, 1KHz Audio Output Sync Delay: <10ms IEC 61000-4-2: ±8kV (Air-gap discharge) & ±4kV (Contact discharge)

